

CWNA

Exam PW0-250

Certified Wireless Design Professional (CWDP)

Version: 6.0

[Total Questions: 60]

Question No : 1

After surveying for the ideal mounting locations for APs, you have been asked to compromise RF propagation optimization due to aesthetic concerns raised by your customer. In the end, you've decided to mount the APs in the ideal locations and paint the APs so they go unnoticed in the environment.

What is a valid recommendation or consideration when painting APs? (Choose 2)

- A. Always use paints with metallic dye in them to prevent potential RF propagation impact.
- B. Do not paint the notification LEDs on the AP, but configure them to be dim or turned off altogether until troubleshooting is required.
- C. Painting APs may void the product manufacturer's warranty.
- D. Most AP models for indoor environments come in a variety of form factors and colors. Painting is never recommended.
- E. Painting APs always introduces a fire and gas emissions hazard and should be avoided for all indoor APs.

Answer: B,C

Question No : 2

When deploying long-distance 802.11 bridge links (10 miles / 16 km), what parameter may be critical for improving data flow by reducing retries caused by the long distances?

- A. The sequence control field value
- B. The acknowledgement timeout threshold
- C. The minimum transmit data rate value
- D. The CTS-to-self threshold
- E. The Beacon interval
- F. The PHY parameter set field


Answer: B

Question No : 3

One of your customers plans on providing wireless coverage to a warehouse facility. After performing an initial walkthrough, you collect the following information:

CWNA PW0-250 : Practice Test

- ✍ The central part of the warehouse is between 400 and 600 feet (122 to 183 meters) from the warehouse switches mounted on the walls.
- ✍ The warehouse map was provided by the customer and is displayed in the exhibit.
- ✍ The warehouse storage is composed of metallic racks with varying inventory levels and contents, from electronics and plastic toys to food pallets and juice bottles.
- ✍ Workers need basic data coverage from their working location, and are not highly mobile. They usually work from one single aisle, and their laptop is on a cart with wheels.

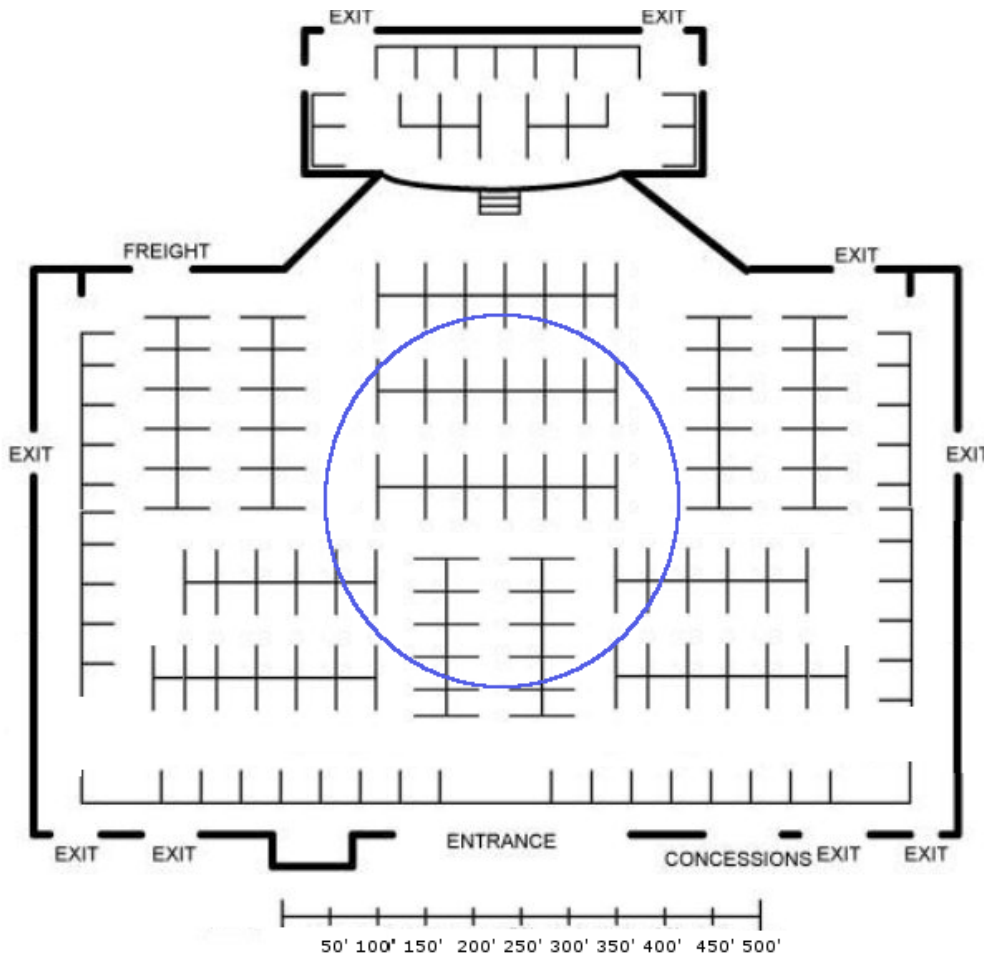

What would be your recommendation to provide coverage to the central area (indicated by a blue circle) of the warehouse?

- A.** Equip workers laptops with a directional antenna and install APs less than 328 feet (100m) away from the switch.
- B.** In this case, extend the cable length just beyond 328 feet (100 m) and position APs as close as possible to the central area of the warehouse.
- C.** Position APs along the walls, and equip the APs with Yagi antennas to cover the central area.
- D.** Install APs for client access in the central area and use a mesh backhaul link to connect to the DS.

Answer: D

Question No : 4

Which definition correctly describes the “local MAC” variation of the centralized WLAN architecture?

- A.** All MAC functions are performed by the AP. A minimal subset of network control is offloaded to the WLAN controller along with management and monitoring functions.
- B.** PHY functions are performed directly by the AP. MAC functions are divided almost equally between the WLAN controller and the AP, according to the time sensitivity of the feature or service.
- C.** The AP provides the RF termination point for the WLAN, but performs very few of the WLAN functions or services. The WLAN controller performs all MAC functions and the AP is very simple and lightweight.
- D.** All RF-, data-, and control-related WLAN functions are performed by the AP. APs coordinate network services with one another and are managed by a WNMS, so no WLAN controller is used in this architecture.

Answer: A

Question No : 5

When a WLAN controller transmits an Ethernet frame that has an IEEE 802.11 frame as its payload to a lightweight AP, what type of QoS marks can be applied to the Ethernet frame and/or its payload? (Choose 3)

- A.** IEEE 802.1Q PCP marks in the Ethernet frame header
- B.** User Priority marks in the IEEE 802.11 frame header
- C.** Throughput subscription marks in the Ethernet frame header
- D.** MPLS tags from the Label Edge Router (LER)
- E.** DSCP marks to the ToS bits in the encapsulating IP packet header
- F.** RSVP tag if RTP is the payload of the IEEE 802.11 frame

Answer: A,B,E

Question No : 6

In a centralized WLAN architecture, what new problem may arise when you change the data forwarding model from centralized to distributed? (Choose 2)

- A. APs that were designed for a centralized forwarding model may not support all features in distributed forwarding mode.
- B. The Ethernet switch ports to which APs are connected may need to be reconfigured to support VLAN tagging and QoS at the network edge.
- C. All RRM controls will also need to be distributed to a master AP that acts as a channel and transmit power arbiter for other APs in the ESS.
- D. Centralized control functions, such as key management and distribution, RRM, and load balancing will no longer be supported.
- E. APs will not have the processing capabilities to support AES-CCMP, so TKIP will be the recommended encryption method.

Answer: A,B

Question No : 7

Your customer location is equipped with DAS, originally deployed to relay a GSM signal indoors and provide 802.11 data coverage to static stations. What type of wireless application would be least likely to be supported by this RF distribution model?

- A. On-demand video streaming over wireless
- B. Data connection with frequent roaming
- C. Location-based services for wireless assets or RFID tags
- D. VoWLAN if the codec is G.729.
- E. FTP over implicit TLS/SSL

Answer: C

Question No : 8

In a manufacturing facility with highly reflective materials, you are planning an upgrade to your existing 802.11b solution. You have chosen a dual-band 802.11n infrastructure product for this purpose. Your client applications include:

Handheld scanners — for inventory management

Toughbooks (laptops) — mounted on forklifts for inventory and workflow management

VoWiFi phones — used by select employees throughout the facility

You are evaluating all of the 802.11n enhancements and determining which features to enable for your environment and applications.


In this scenario, what 802.11n enhancements should NOT be enabled on the 2.4 GHz radio of the new APs? (Choose 2)

- A. 40 MHz channels
- B. Short guard intervals
- C. Block Acknowledgments
- D. Frame aggregation
- E. MRC
- F. STBC

Answer: A,B

Question No : 9

According to WLAN security design best practices, what is true of the EAP properties shown in the exhibit?

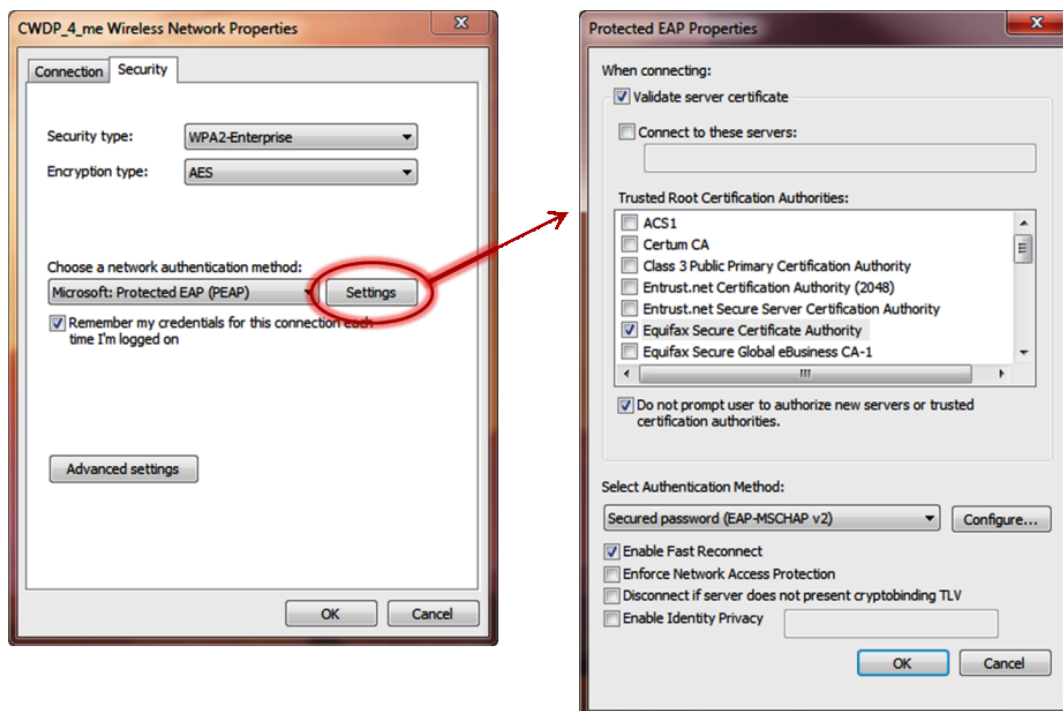

- A. The “Validate server certificate” checkbox should be checked if you purchased a third-

party SSL certificate for the AS, but left unchecked if you have a self-signed certificate for the AS.

B. The “Validate server certificate” checkbox should always be checked to prevent MITM attacks from rogue authentication servers.

C. The “Trusted Root Certification Authorities” list is provided to identify the certificate that the client should send to the AS for client authentication.

D. The “Do not prompt user to authorize new servers or trusted certification authorities” box should be checked only for administrative users.

E. The “Enable Identity Privacy” checkbox and anonymous name field are only useful for networks supporting EAP-LEAP.

Answer: B

Question No : 10

Given: Use Exhibit 1, 2, and 3 to answer the question.

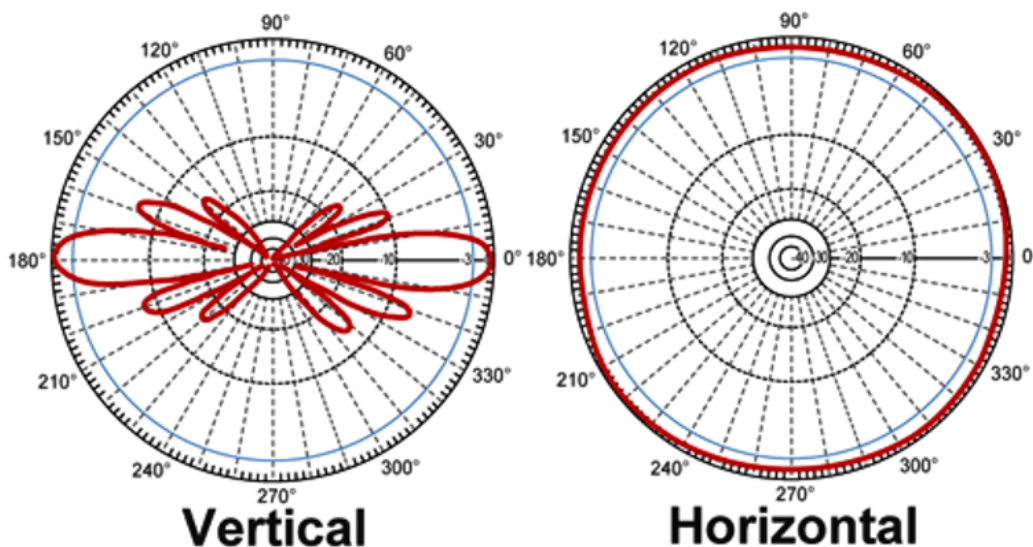


Figure 1



Figure 2



Figure 3



Figure 4



Figure 5



Figure 6



The azimuth and elevation charts for which type of antenna are shown in Exhibit 1?

- A. Figure 1
- B. Figure 2
- C. Figure 3
- D. Figure 4
- E. Figure 5
- F. Figure 6

Answer: C

Question No : 11

Multicast video applications typically require special treatment on the Wi-Fi network due to