



HP QuickTest Professional 10.0 Software

Version: 6.1

[Total Questions: 67]



Question No: 1

How can you add recordable or non-recordable operations to your test? (Select three.)

- A. Use the Step Generator.
- B. Insert through Keyword View.
- **C.** Drag objects from the object repository.
- D. Drag objects from the Active Screen.
- E. Drag objects from Available Keywords.
- **F.** Drag objects from the Data Table.

Answer: A,B,E

Question No: 2

What is a QuickTest Professional test comprised of?

- A. calls to actions
- **B.** calls to actions (reusable only)
- C. calls to QuickTest Professional tests
- D. calls and copies of actions

Answer: A

Question No: 3

Which names are used to identify the status of your application before and after your automated test executes? (Select two.)

- A. initial condition
- B. static state
- C. end condition
- **D.** down condition
- E. done condition

Answer: A,C



Question No: 4

During the planning phase, you decide to create multiple actions that can be combined and reused to achieve testing goals. Which element is critical for identifying the actions to be recorded and how to combine them?

- A. input data
- B. parameters
- C. initial and end conditions
- D. visual cues

Answer: C

Question No:5

What are the default add-ins installed with QuickTest Professional? (Select three.)

- A. .NET
- **B.** ActiveX
- C. HTML
- D. Web
- E. Java
- F. OCX
- G. Visual Basic

Answer: B,D,G

Question No: 6

Which Quick Test Professional View Option will show you the repositories associated with each action?

- A. Resources
- **B.** Information
- C. Script Repository
- D. Active Screen

Answer: A

Question No:7

Where can you reset the add-in manager if it does not display when you launch QuickTest Professional?

- A. General Options
- B. Run Options
- C. Test Properties
- D. Test Settings

Answer: A

Question No:8

You set your Record and Run settings to Record, and then run a test on any open browser. Which applications will be recorded? (Select two.)

- A. Firefox
- B. Safari
- C. Silverlight
- D. Chrome
- E. Internet Explorer


Answer: A,E

Question No: 9 DRAG DROP

Click Next or More to continue.

Click the Task button.




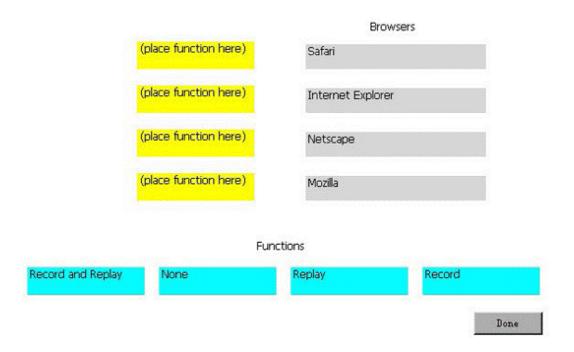

You have set your Record and Run settings to Record and run tests on any open browser.

Indicate the function that works for each browser.

Answer:

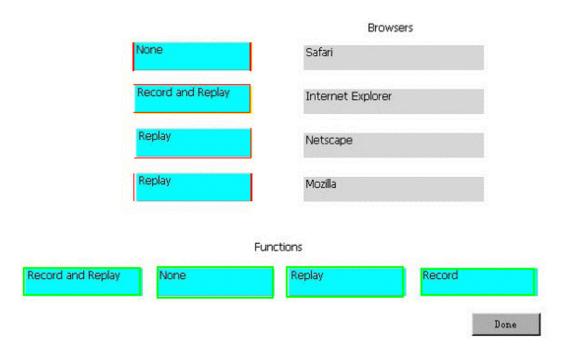

Question No: 10



Which directory is the default directory in the QuickTest Professional file structure where the local Data Table is located?

- A. Action 0 folder
- B. Local Action folder
- C. Default Test folder
- **D.** Data folder

Answer: C

Question No: 11

Which QuickTest Professional menu item should you use when emailing a QuickTest Professional test to another tester?

- A. Send Email...
- B. Export Test to Zip File...
- C. Save Test with Resources...
- D. Export Test and Email...

Answer: B

Question No: 12

You have defined a global synchronization timeout of 30 seconds for your test. The synchronization point timeout for a button to become enabled is set to 10000. During playback of the script, what is the maximum amount of time QuickTest Professional will wait for the button to become enabled?

- A. 10 seconds
- B. 30 seconds
- C. 40 seconds
- **D.** 10030 seconds

Answer: C