

Veritas

Exam VCS-253

Administration of Veritas Cluster Server 6.0 for UNIX

Version: 6.0

[Total Questions: 235]

Question No : 1

Which command allows the administrator to leave services currently under Veritas Cluster Server control in a running state while performing configuration changes?

- A. hstop -all -force
- B. hstop -all -evacuate
- C. haconf -all -force
- D. haconf -all -evacuate

Answer: A

Question No : 2

What is a function of the Enforce Server?

- A. provides a GUI for policy creation
- B. detects incidents
- C. writes incidents to all detection servers
- D. deploys agents to endpoint computers

Answer: A

Question No : 3

When resolving or dismissing incidents, Symantec recommends that an incident responder completes which action?

- A. Add comments
- B. Delete incidents
- C. Set severity
- D. Export incidents

Answer: A

Question No : 4

What is a benefit of the Symantec Data Loss Prevention 9.0 security architecture?

- A. Communication is initiated by the detection servers inside the firewall.
- B. Mutual authentication between servers is based on the Challenge Handshake Authentication Protocol (CHAP).
- C. Endpoint Agent to Endpoint Server communication uses the Triple Data Encryption Standard (3DES).
- D. Encryption is provided for confidential information across system components.

Answer: D

Question No : 5

Which three functions of the communications architecture ensure that the system is able to automatically recover should a network connectivity failure occur between the detection servers and the Enforce Server? (Select three.)

- A. Database backup
- B. Autonomous monitoring
- C. Automatic synchronizing
- D. Incident queuing
- E. Alert archiving

Answer: B,C,D

Question No : 6

An administrator needs to manually add a new resource type to a running cluster.

What should the administrator do after installing the agent software on each Veritas Cluster Server (VCS) node?

- A. Generate the appropriate hatype commands with hacf -addtype
- B. Use the hatype command to add the new resource type
- C. Stop and restart VCS so that the new resource type is recognized as valid
- D. Use the hares command to add the new resource type to the cluster

Answer: B

Question No : 7

An administrator is configuring a websp service group and a dbsg service group. The administrator needs to configure Veritas Cluster Server so websp will only come online if dbsg is online somewhere in the cluster.

If dbsg faults, websp should stay online. If dbsg is unable to fail over, the websp should stay online.

Which type of service group dependency does this require?

- A. Online global soft
- B. Online global firm
- C. Online local soft
- D. Online local firm

Answer: A

Question No : 8

Which characteristic of Veritas Cluster Server attributes allows the public interface to be different for each of the systems in the cluster?

- A. Global
- B. Local
- C. Custom
- D. Proxy

Answer: B

Question No : 9

Only the TriggerPath service group attribute value for the websp service group is set to "bin/websp" for cluster nodes where the websp service group can be online.

Where will Veritas Cluster Server (VCS) look for the preonline event trigger if the preonline event trigger is also enabled on all cluster systems for the websp service group?

- A. \$VCS_HOME/preonline/triggers/bin/websg
- B. \$VCS_HOME/bin/websg/preonline
- C. \$VCS_HOME/bin/websg/internal_triggers
- D. \$VCS_HOME/preonline/bin/websg

Answer: B

Question No : 10

What is an advantage of using a Dashboard report?

- A. Incident responders can execute Smart Responses from them.
- B. They allow incidents to be viewed across multiple products.
- C. They can be used as work queues for incident responders.
- D. Incident responders can see the history of each incident.

Answer: B

Question No : 11

An administrator adds a new user within a cluster that is running in a non-secure mode.

In which file will the user name be stored?

- A. /etc/VRTSvcs/conf/config/secure.cf
- B. /etc/VRTSvcs/conf/config/main.cf
- C. /etc/VRTSvcs/conf/config/types.cf
- D. /opt/VRTSvcs/conf/config/users.cf

Answer: B

Question No : 12

Given a service group with all resources online, what should be done to prevent the top resource in a dependency tree from causing a failover when it is taken offline outside the cluster?

- A. Freeze the resource
- B. Disable the dependency links for the resource
- C. Set the Critical attribute for the resource to 0
- D. Freeze the node

Answer: C

Question No : 13

Where are the installation log files created when Veritas Cluster Server is installed?

- A. /opt/VRTS/install/logs/
- B. /var/VRTS/install/logs/
- C. /opt/VRTSvcs/install/logs/
- D. /var/VRTSvcs/install/logs/

Answer: A

Question No : 14

Which feature is a key benefit of onscreen notification?

- A. It informs endpoint users when an Endpoint Discover scan identifies confidential files on their computers.
- B. It informs endpoint users when they try to copy or transmit confidential data from the endpoint.
- C. It informs endpoint users that the DLP agent has just been installed on their computers.
- D. It informs the system administrator when specified system events have occurred within the system.

Answer: B

Question No : 15

What are two reasons to implement SCSI-3 I/O fencing? (Select two.)


- A. Disk-based heartbeat

- B. Data protection
- C. Lock disk
- D. Cluster communication
- E. Membership arbitration

Answer: B,E

Question No : 16

Refer to the exhibit.

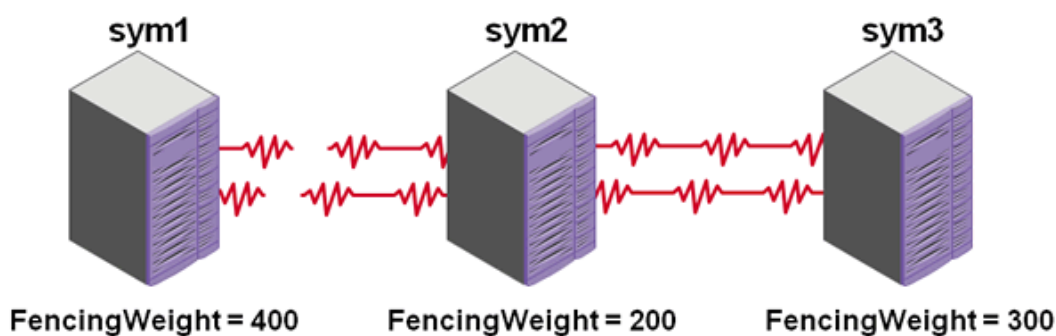

An administrator has configured preferred fencing. Cluster communication breaks and separates sym1 from the other cluster nodes.

Which node(s) will survive the fencing race?

- A. sym1 only
- B. sym2 only
- C. sym3 only
- D. both sym2 and sym3

Answer: D

Question No : 17

What does a data loss prevention solution help an organization identify? (Select three.)

- A. Employee education opportunities
- B. Risk of virus infection

- C. Unprotected content on laptops
- D. Illegally obtained software on desktops
- E. Encryption enforcement opportunities

Answer: A,C,E

Question No : 18

Which two products are required for quarantining confidential files residing inappropriately on a public file share? (Select two.)

- A. Network Discover
- B. Endpoint Discover
- C. Network Monitor
- D. Network Prevent
- E. Network Protect

Answer: A,E

Question No : 19

Which two standard Veritas Cluster Server resource types can determine if an application has unexpectedly exited? (Select two.)

- A. Process
- B. FileOnOff
- C. Proxy
- D. Application
- E. Phantom

Answer: A,D

Question No : 20

Which component of Microsoft Outlook Personal Folder (.pst) files does Network Discover apply filters to?

- A. Individual emails in the .pst file
- B. The entire .pst file
- C. Attachments in the .pst file
- D. Folders in the .pst file

Answer: B

Question No : 21

Which agent entry point is used when running a virtual fire drill for a specific resource?

- A. Info
- B. Online
- C. Monitor
- D. Action

Answer: D

Question No : 22

What information must be specified when adding a resource to a service group?

- A. Cluster identifier
- B. System name
- C. Attribute values
- D. Service group name

Answer: D

Question No : 23

What should be considered before enabling the Preventing Concurrency Violation (ProPCV) attribute in a service group?

- A. The MonitorProgram attribute must be configured for the Application resource type.
- B. The MonitorProcesses attribute must be configured for the Application resource type.
- C. The Mode value for the IMF attribute of the Application type resource is set to 1.

D. The ProPCV attribute is prevented from being changed when the service group is active.

Answer: B

Question No : 24

What occurs when the `hastop -local -force` command is issued on the active node in a two-node active/passive cluster?

- A. The services will be shut down on the active node and brought up on the passive node.
- B. The services will continue to run on the active node while HAD is stopped.
- C. The service group behavior will follow the value of the EngineShutdown attribute while HAD is stopped.
- D. The online service groups on the primary node are taken offline and remain offline until started manually.

Answer: B

Question No : 25

On which system can you set `UseMpathd=1` in a MultiNICB resource?

- A. Solaris
- B. Linux
- C. AIX
- D. HP-UX

Answer: D

Question No : 26

How many levels deep can a service group dependency tree be?

- A. 1
- B. 3
- C. 5
- D. 7